

JS-6 Series



Introduction

JS-6 Series Interconnect Box provides order, compact and simple connecting solution for users. JS-6 series Interconnect box with special designed Slid Lid which can protect connectors well. Open, raise the lid and push it into the slide rails, available cables/ connects will show; Close, pull up the lid up and close it. In order to meet demands of different user, JS-6 series provides two different connection types: wire pulling type (JS-61 Series) and AAP Insert Plate type (JS-62 Series).

Product Features

- Cover-lifting and falling (sliding lid) structure;
- Top surface available in brushed black or silver finishes, custom finishes is accepted;
- Provides two different connection types: wire pulling type (JS-61 Series) and AAP Insert Plate type (JS-62 Series);
- JS-61 Series can accommodate six cables (maximal);
- JS-62 Series can an accommodate 8pcs 1U AAP Insert Plate (maximal);
- JS-61 Series supply 1.7m cable;
- JS-62 Series With double (top and bottom) changeable AAP insert plate;
- Various combination of interface, fit for big and medium size conference room, executive desks.


CCC Certificate Number: 2013010201596383

CE Certificate Number: N° VTUPV-269/2011ZAHR


ROHS Certificate Number: W02171017304C

Main Specifications

Model	JS-6
Table Thickness	Maximal 60mm, 125mm(to be connected to extended part)
Temp. range	0 ~ 50°C (Non-condensing)
Weight	About 3kg~3.5kg
Dimensions	Panel: 199mm*129mm R=16mm Cutout Dimension: 191mm*121mm R=12mm Package: 250mm*200mm*200mm

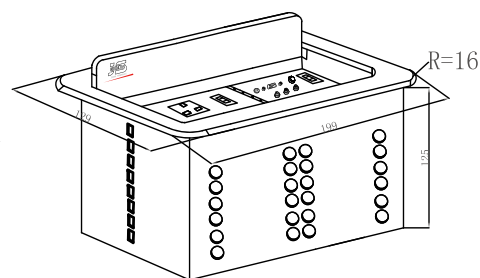

Overall Dimension (mm)

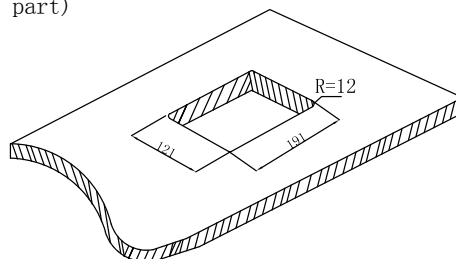

Cutout Dimension (mm)



JS-610

Universal AC Outlet	*1 (Can be replaced by US,UK,FR,2-Pin Europe AU, SA power outlet.)
Computer Video	*1 (VGA 15-Pin HD, With 1.7m cable)
Stereo Audio	*1 (3.5mm audio, With 1.7m cable)
Network	*1 (With 1.7m cable)
USB	*1 (Type A, Version USB2.0, With 1.7m cable)



JS-611

Universal AC Outlet	*1 (Can be replaced by US,UK,FR,2-Pin Europe AU, SA power outlet.)
Network	*1 (RJ45 (CAT.5/CAT.6)/ RJ11)
Computer Video	*1 (VGA 15-Pin HD, With 1.7m cable)
Stereo Audio	*1 (3.5mm audio, With 1.7m cable)
Network	*1 (With 1.7m cable)
USB	*1 (Type A, Version USB2.0, With 1.7m cable)




Closed



Open

AC OUTLET OPTIONS

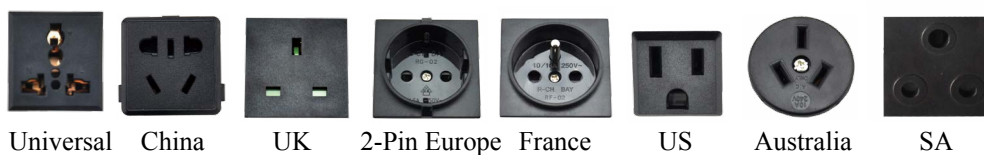

Universal

China

UK

2-Pin Europe

France

US

Australia

SA



JS-620


Universal AC Outlet	*1 (Can be replaced by US, UK, FR, 2-Pin Europe AU, SA power outlet.)
Computer Video	*1 VGA 15-Pin HD
Stereo Audio	*1 3.5mm audio
Network	*2 (RJ45 (CAT.5/CAT.6)/ RJ11)
Shift Button	*1
Microphones	*1 3-pin XLR connectors




JS-621

Universal AC Outlet	*1 (Can be replaced by US, UK, FR, 2-Pin Europe AU, SA power outlet.)
Computer Video	*1 VGA 15-Pin HD
Stereo Audio	*1 3.5mm audio
Network	*4 (RJ45 (CAT.5/CAT.6)/ RJ11)
Shift Button	*1
Microphones	*1 3-pin XLR connectors


AAP Insert plate(1U)

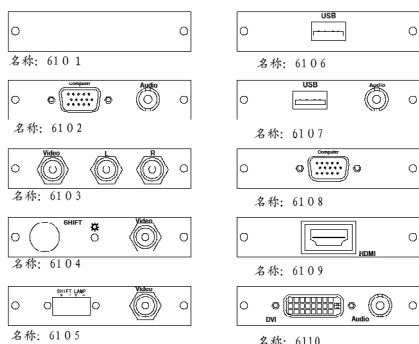

AAP Insert plate(2U)

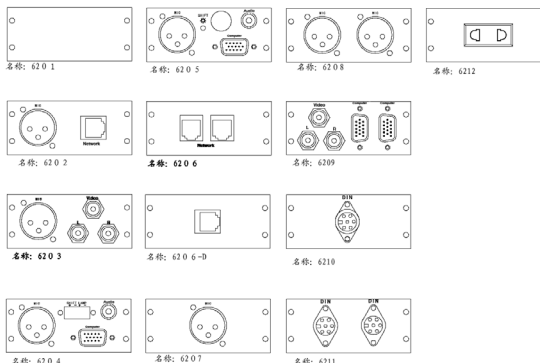

AAP Insert plate(3U)

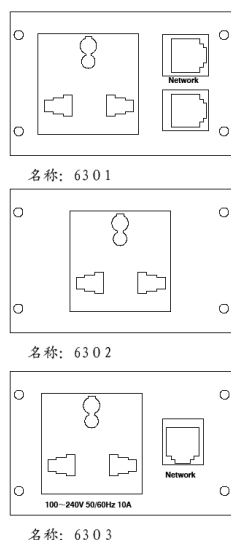

AAP Insert plate(4U)

